

### **Installation instructions for R type (Rack) Nisnas fenders :**

(only rear fender installment, the front fender installation is identical to regular fender installation, see instructions attached)

#### **Step 1)**

Begin by installing brackets (supplied in separate box) onto the wood fenders. Please note that the rear fender has two brackets while the front has one.

Once installed, begin by installing the fender first onto the brake-bridge (image 1). Keep in mind that the placement of the bracket should be directly behind the Brompton Rack (unlike the regular fender placement). Tighten the main bolt for a secure fit. Please note that often you will need to give the bracket a 1mm bend for better fit, this is normal and is made for it.

#### **Image 1**




See image 2 for a complete view of the assembly.



Step 2:

Fitting the bracket onto the back of the rack (See image 3). The fender needs to be slightly bowed (pressed) in order to provide room for the wheel. Allow the bracket in image 3 to align to the hole of the rear rack and press the bracket toward the hole. Then catch the bolt with the nut behind it and tighten it, this will bow the fender slightly and provide room for the wheel. Again, please note that the bracket might need to be slightly opened 1mm for best fit.

**Image 3**

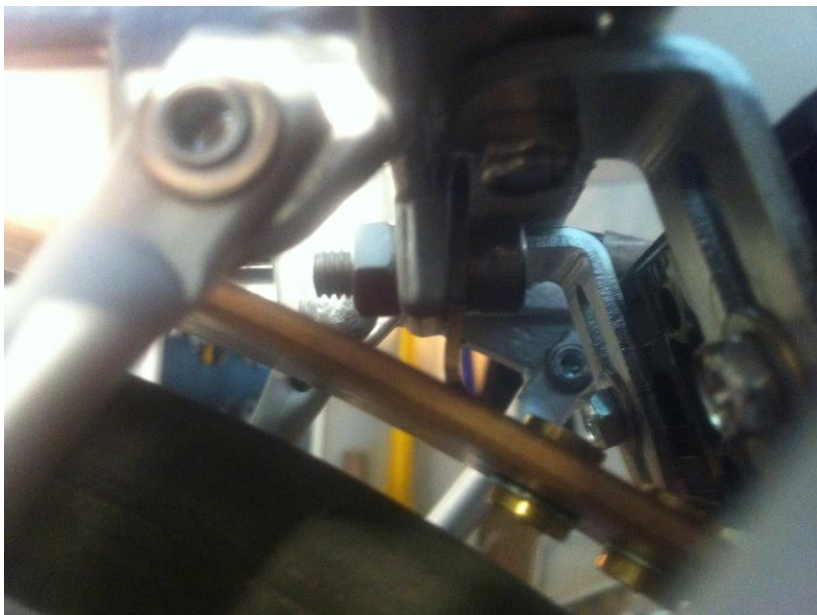

**Step 3:**

Finishing the alignment:

Install the reflector to the rack if you wish (note that it may touch the fender but will not disturb it). We recommend that you use aftermarket reflectors if the slight touch is an issue.

Tighten all bolts one last time to make sure the brass parts are all in place and the fender is aligned in the center.

